

## Zt-2 Wideband Air/Fuel Ratio Meter and Datalogging System : Model 2010 with LSU 4.9 O2 Sensor

### Zt-2 Kit Items

- |  |  |
|--|--|
| Zt-2 Wideband AFR Controller             | Datalogging cable with RJ-12 to DB-9 converting plug |
| Oxygen Sensor Harness (10' length)       | 2 Pin EGT Sensor Connector+2 Crimp Pins              |
| Signal Harness (1' length)               | Datalogging software available for download          |
| Bosch LSU Wideband Oxygen Sensor LSU 4.9 |  |
- Additional displays, gauges, Boost (MAP) Sensor, EGT Sensor, Pressure and Temperature sensors are included if purchased.

### Installation instructions

The Wideband Oxygen sensor must be positioned after the turbocharger and before the catalytic converter. Check emissions regulations on placing a device before catalytic converter. Otherwise place after catalytic converter. Recommended installation requires welding the O2 sensor bung in the down pipe at least 16" away from the turbo. A stock narrowband O2 sensor location is usually too hot for the wideband O2 sensor. The oxygen sensor must be positioned vertically (wires pointing upwards between 10 and 2 o'clock) to prevent cracking of the sensor ceramic element and protect sensor against water condensation.

The Zt-2 shall be mounted inside vehicle cabin. A small connector at the controller side of the Oxygen Sensor Harness allows for easy routing through the firewall. Make sure to not damage the connector when pulling through the firewall. Do not use pliers to pull the connector. Connect the larger 6pin connector to the oxygen sensor. Make sure the Oxygen Sensor Harness is secured and placed away from heat sources, specially the down pipe, catalytic converter, and hot engine parts. An overheated and internally shorted harness may damage the oxygen sensor and the Wideband Controller.


Connect the 6-pin Oxygen Sensor Harness connector, the 12-pin Signal connector and the Serial Cable to the Zt-2 Wideband Controller. Tap the Signal Harness RED wire to the switched power (+12V) and BLACK wire to the ground. The Wideband Controller has a built in auto-resettable 4A fuse, therefore, no additional in line fuse is required. The cold sensor warm up time is about 15-30 seconds. Install ZDL software on a PC. Wait 6 seconds for the ZDL datalogger serial data activation. Make sure the COM port chosen in the logging software matches the COM port number of your PC laptop. Press **S** on the keyboard to adjust COM port number and RPM multiplier. If you are using a USB to serial adapter make sure the virtual COM port number assigned by the adapter driver is the same as chosen in the logging software. Some USB serial adapters assign COM ports into a higher number than COM 8. You can adjust the COM port number in the logging software by going into Settings, Plots/Com Port. The USB serial adapter COM port needs to be adjusted through a control panel.

Zt-2 Inputs/Outputs	Signals	range
Bosch Wideband O2 sensor	Lambda	1.43 to 0.64 Wideband
Serial data output for the Zeitronix Wideband LCD Display	AFR	21.0 to 9.5 Wideband
Serial data output for real time datalogging (PC laptop or PDA required)		
Analog Wideband Output	Analog Output	0-5V
RPM input, tach, low side ignition coil, crank, cam sensor	RPM	0-5V, 0-12V, square wave, 0 -18000 RPM
Throttle position input	Throttle Position	0-5V, 0-100 %
Boost sensor input	Boost	-650mmHg to 10 BAR, -25inHg to 150 PSI
EGT probe input	EGT, K Type	200C to 1200C, 395F to 2200F
USER1 Input	User1 Input	0 to 5V
USER2 Input	User2 Input	0 to 5V
Warning Output	Warning Output	Active High, 0-5V , 0.002A

### Signal Harness


PIN #	WIRE COLOR	FUNCTION
1	RED	Switched power (ex. ignition)
2	WHITE	Linear Wideband AFR Analog Output for aftermarket loggers
3	GREEN	RPM Input. 0-5V, 0-12V square wave, tach signal, primary (low voltage) side of ignition coil, crank, cam sensor
4	ORANGE	Zeitronix Boost (MAP) Sensor Input
5	WHITE/BLUE	Warning Output
6	YELLOW	Zeitronix Boost Sensor +5V Power.
7	BLACK	Power Ground
8	WHITE/BROWN	USER 2 Input 0-5V. Programmable for Air Intake, Water, Oil <b>Temperature</b> . Fuel, Boost <b>Pressure</b>
9	PURPLE	
10	GREY	Throttle Position Sensor
11	BROWN	Sensor Ground (Boost Sensor ground reference)
12	BLUE	USER1 Input 0-5V

WHITE and BROWN wires are provided to connect the Zt-2 Wideband Controller to your favorite engine management system.

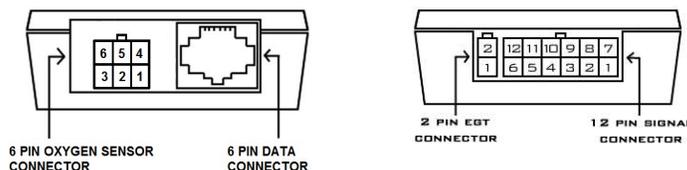

**EGT Sensor**

The Zt-2 is capable of reading and logging the Exhaust Gas Temperature through a commonly used Chromel Alumel K type thermocouple. The Zeitronix EGT probe plugs right into the Zt-2. To retrofit your EGT probe connect the positive side of the thermocouple wire to pin #2 and negative wire to pin #1 of included two-pin connector. Pin #2 is the closest to the connector's lock. Typically a K type thermocouple red wire is negative, a yellow wire is positive. Note that a K type thermocouple extension wire needs to be used. Extending the EGT probe using a copper wire affects the EGT reading accuracy.

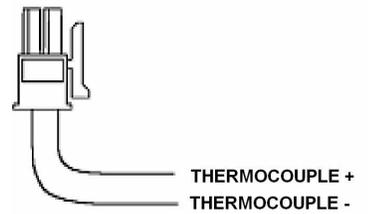

**Boost Sensor (MAP Sensor)**

The Boost Sensor is a 3.5 Bar Kavlico Zeitronix PN 80-2500-001. If a 5 Bar (75 PSI absolute pressure) MAP sensor is used Zeitronix 2130-50-A, 2130-75-A. Select 75 PSI MAP from the ZDL software Setting/ Hardware Boost Settings/ 75 PSI MAP Sensor. Both sensors can be calibrated for altitude offset via the ZDL software. Zeitronix MAP sensor is more accurate than most boost gauges.

Connect the Boost Sensor to the Zt-2 as follows	
Zt-2 Wire Color	Boost Sensor Wire Color
YELLOW (+5V Supply)	RED
BROWN (Signal Ground)	BLACK
ORANGE (Boost Input)	GREEN


**LCD Display selection between BOOST, USER and TPS.**

Connect the Zt-2 Boost Input (orange wire) as follows:


Zt-2 Boost Input Wire Color	Orange Wire Connection to:	LCD Display Selection
Zt-2 ORANGE	Boost Sensor GREEN	BOOST
Zt-2 ORANGE	Zt-2 BROWN	USER
Zt-2 ORANGE	Zt-2 YELLOW	TPS

The EGT and the Boost sensors are optional and do not affect Lambda and AFR readings.

Connecting the Zeitronix Wideband AFRM Display and the Zt-2

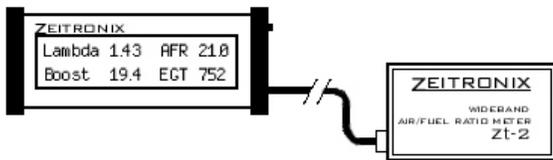

Connecting the Zt-2, PC and the AFRM Display through the provided serial data splitter

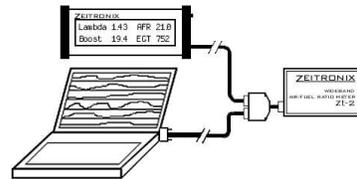

**LCD Display peak and hold button**

Short press- peak values, “#” shown next to Lambda and AFR, C/F, PSI/BAR units next to Boost and EGT. Long press- (3s) of the button resets peak values.

**LCD Display USER2 input setup.**

Hold peak and hold button then power up the Zt-2 unit (turn ignition on). The LCD revision is displayed. If revision LCD 6 is displayed the display will move to LAMBDA AFR setting. Toggle between LAMBDA/USER2 or AFR/U2 settings. Releasing the button for 2 seconds save new setting and initiate LCD Display start up sequence.

**User2 Input** can be setup via ZDL software to display voltage, air intake, water, oil temperature; fuel pressure or additional vacuum, boost pressure, Ethanol content E-85 from Zeitronix ECA or ECA-2, battery voltage.

**Linear Wideband Output (White Wire)**

The Linear Wideband Output transfer function is  $AFR=2xV+9.6$



**Warning!**

For automotive use only. Using the O2 wideband O2 sensor with leaded gasoline, two stroke or diesel engines will significantly shorten the sensor's life.

This product is for off road use only. Do not expose to moisture. Do not disassemble, modify or tamper. Never leave the wideband oxygen sensor in the exhaust stream without power. The Wideband Controller must be powered and connected to the oxygen sensor at all times. Leaving an unpowered oxygen sensor in the exhaust will result in sensor damage. Never mount the oxygen sensor in stock factory location or closer than 16" from the cylinder head exhaust ports or a turbocharger. Exposing the sensor to the temperature above 800 C will cause sensor damage. Never position the oxygen sensor at the high-pressure side of the turbocharger. Never place the Wideband Controller or LCD display in a place, which obstructs the view. Never tune the car while driving.

To be used with Bosh LSU 4.9 wideband sensor only.

Tune your engine responsibly. Zeitronix Inc. is not responsible for any damages.

## Zeitronix Audio-Visual Warning and Trigger Box ZAVT-1. (Sold separately)

The Zt-2 is capable of setting an audio-visual alarm and triggering a relay through ZAVT-1 box.

The ZAVT-1 connects to the Zt-2 Warning Output (White wire with a blue stripe).

### APPLICATIONS

- AFR too rich                      The alarm activates when too rich mixture is detected.
- AFR too lean                      The alarm activates when too lean mixture is detected.
- A combination of AFR too rich and AFR too lean alarms can be used to tune for a specific AFR window.
- EGT too high                      The alarm activates when EGT exceeds a safe user selected level.
- RPM too high                      Shift-light functionality with a bonus of audio alarm and a relay trigger.
- TPS too high                      The alarm activates when TPS exceeds a selected alarm level.
- 0-5V Input too high              The alarm activates when 0-5V User Input exceeds a selected alarm level.
- 0-5V Input too low              The alarm activates when 0-5V User Input is lower than a selected alarm level.
- Relay trigger                      Open or close a relay circuit to activate or deactivate additional devices at a set warning level. Typically used to add a control to your boost setting, nitrous or alcohol injection and other devices capable of engine destruction. The relay output can trigger anything, on or off, from additional fuel pump, nitrous to alcohol injection.

### SOFTWARE SETUP

Open the Zeitronix Logging Software. Connect the Zt-2 Wideband AFR Meter into a PC COM port and power up the Zt-2. Make sure the log graphs are shown on the screen. Then open the Warnings and Triggers menu.


The Parameters can be selected as a Simple or Complex Warning.

A Simple Warning is set when any of selected parameters exceed preset warning level. Simple Warnings are independent from each other.

A Complex Warning is set when all selected parameters exceed preset warning level.

#### EXAMPLE

In an example shown here a warning will be activated if the EGT exceeds temperature of 920C **OR** if the Input1 lower than 3.4V. Also, a warning will be activated if the AFR mixture will be leaner than 12.8 AFR **AND** at the same time the boost level exceeds 23 PSI. The alarm is kept for additional 4 seconds to cool the engine down.

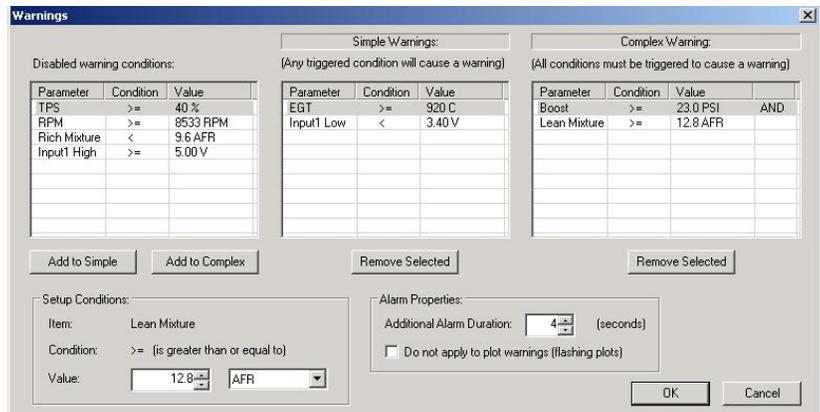

### COMPATIBILITY

ZAVT-1 is compatible with the Zt-2 Wideband AFR Meter REV 9 or higher. Zt-2s purchased after May 9 2006 are compatible. You can check compatibility by accessing Alarms window in the Zeitronix Logging Software Version 2.0.8 or higher. Open the Zeitronix Logging Software. Connect the Zt-2 Wideband AFR Meter into a PC COM port and power up the Zt-2. Make sure the log graphs are shown on the screen. Open Warnings and Triggers menu. The following message is displayed if an incompatible Zt-2 AFR Meter is detected. Contact [sales@zeitronix.com](mailto:sales@zeitronix.com) for possible Zt-2 upgrade.



### Warning!

For automotive use only.  
This product is for off road use only.  
Never place in a location, which obstructs the view. Never tune the car while driving.  
To be used with Zeitronix Zt-2 Wideband AFR Meter only.  
Tune your engine responsibly. Zeitronix Inc. is not responsible for any damages.